


KANBY 2 *batten*

Photometric data


SINGLE LAMP

D.L.O.R. 68% U.L.O.R 17%

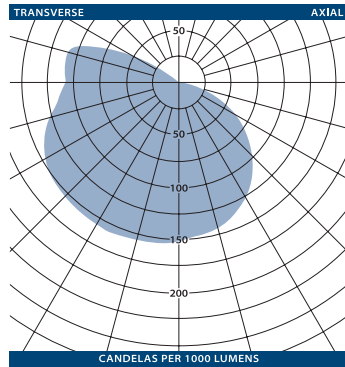

TWIN LAMP

D.L.O.R. 68% U.L.O.R 19%

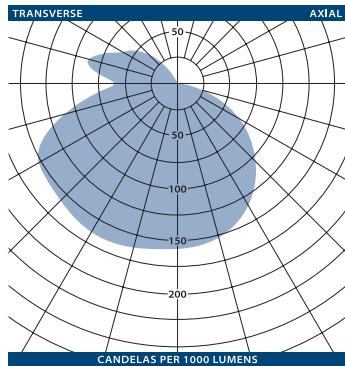

Accessories

DESCRIPTION	NUMBER		
	1200mm	1500mm	1800mm
Side screen attachment ●	KB 3474	KB 3475	KB 4066

● Suitable for single lamp luminaires only



Spares

DESCRIPTION	NUMBER
Single lamp end caps	KB 4615
Twin lamp end caps	KB 4707


batten **KANBY 2**

General purpose batten luminaires

Classified IP20



- Steel end caps and body
- For general indoor commercial applications
- Side screen attachment available
- Maintained emergency or Autotest versions
- May be used with the Eco-System (suffix D types)



Range

SIZE (mm)	LAMP	NUMBER	LENGTH (mm)	FIXINGS	kg	STANDARD CIRCUIT	EMERGENCY CIRCUIT	AUTOTEST CIRCUIT
1200	36W T8 Single	KB 4598	1255	2 - BESA box holes on 610mm centres	3.3	D-E-J-S	D-E-J	D-E-J
	36W T8 Twin	KB 4694				D-E-J-S	D-J	D-J
1500	58W T8 Single	KB 4597	1557	As above	4.3	D-E-J-S	D-E-J	D-E-J
	58W T8 Twin	KB 4693				D-E-J-S	D-J	D-J
1800	70W T8 Single	KB 6005	1823	As above	4.7	D-E-J-S	D-E-J	D-E-J
	70W T8 Twin	KB 6006				D-E-J-S	D-J	D-J

CIRCUIT - add suffix required: **D** - high frequency regulating **E** - electronic start **J** - high frequency **S** - switch start e.g. **KB 4598D** etc.

EMERGENCY VERSION - prefix catalogue number with **'EKB'**.

AUTOTEST VERSION - prefix catalogue number with **'TKB'**.

Emergency and Autotest versions add 0.7kg to weights listed.

LAMPS MUST BE ORDERED SEPARATELY, SEE PAGE 75 FOR DETAILS