



CYCLOPS

X – Purge Controller XP Version



- Simple to install & use
- Highly reliable
- Enclosure purge exhaust vent is part of casing
- Local & remote status alarms
- Casing available in anodized aluminum or 316 stainless steel
- 115 or 230 VAC, up to 12.5 Amps
- All in One Unit

OVERVIEW:

To prevent the possibility of fire or explosion inside the enclosures of energized electrical equipment, a protective gas supply is used to dilute potentially flammable vapors to an acceptable level, creating a safe area for the devices within the enclosure. Positive pressure prevents the ingress of flammable vapors in the surrounding atmosphere from entering into the enclosure as long as positive pressure is maintained. After the enclosure is purged, power may be automatically applied to the protected electrical equipment.

The Purge Solutions CYCLOPS X – Purge Controller provides objective evidence of positive enclosure pressure with both a visible indicator and supplied standard, dry-contact outputs for remote status monitoring. The enclosure purge exhaust vent is an integrated part of the CYCLOPS X – Purge Controller's casing, which mounts directly to the enclosure being purged. No additional holes, sheet metal, or plumbing is required.

FEATURES:

- The CYCLOPS X – Purge Controller mounts directly to purged enclosure. No additional sheet metal enclosures or plumbing is required. (Refer to Figure 1)
- Enclosure purge vent is an integrated part of the CYCLOPS X – Purge Controller casing. No additional holes or plumbing is required in purged enclosure. (Refer to Figure 1)
- Dry contact outputs for remote monitoring of enclosure purge pressure going below 0.30 inches H₂O (0.75 mbar), loss of enclosure purge exhaust vent flow, and CYCLOPS X – Purge Controller in maintenance mode are supplied as standard. Contacts open on alarm (Standard). Contacts closed on alarm (Optional). Order optional contact closed on alarm by adding an “X” at the end of Purge Solutions model number.
- Rugged, distinctive visual LED indicator for local monitoring is supplied as standard.
- For applications where immediate disconnect of power to protected electrical equipment in purged enclosure would result in a more hazardous condition; a bypass switch is provided, which will allow power to the circuits to continue upon loss of purge pressure and / or exhaust flow.
- The CYCLOPS X – Purge Controller is certified to ATEX, CEC, IECEx, NEC / NFPA and CE Marked for installation and use in Division 1 and Zone 1 hazardous areas.

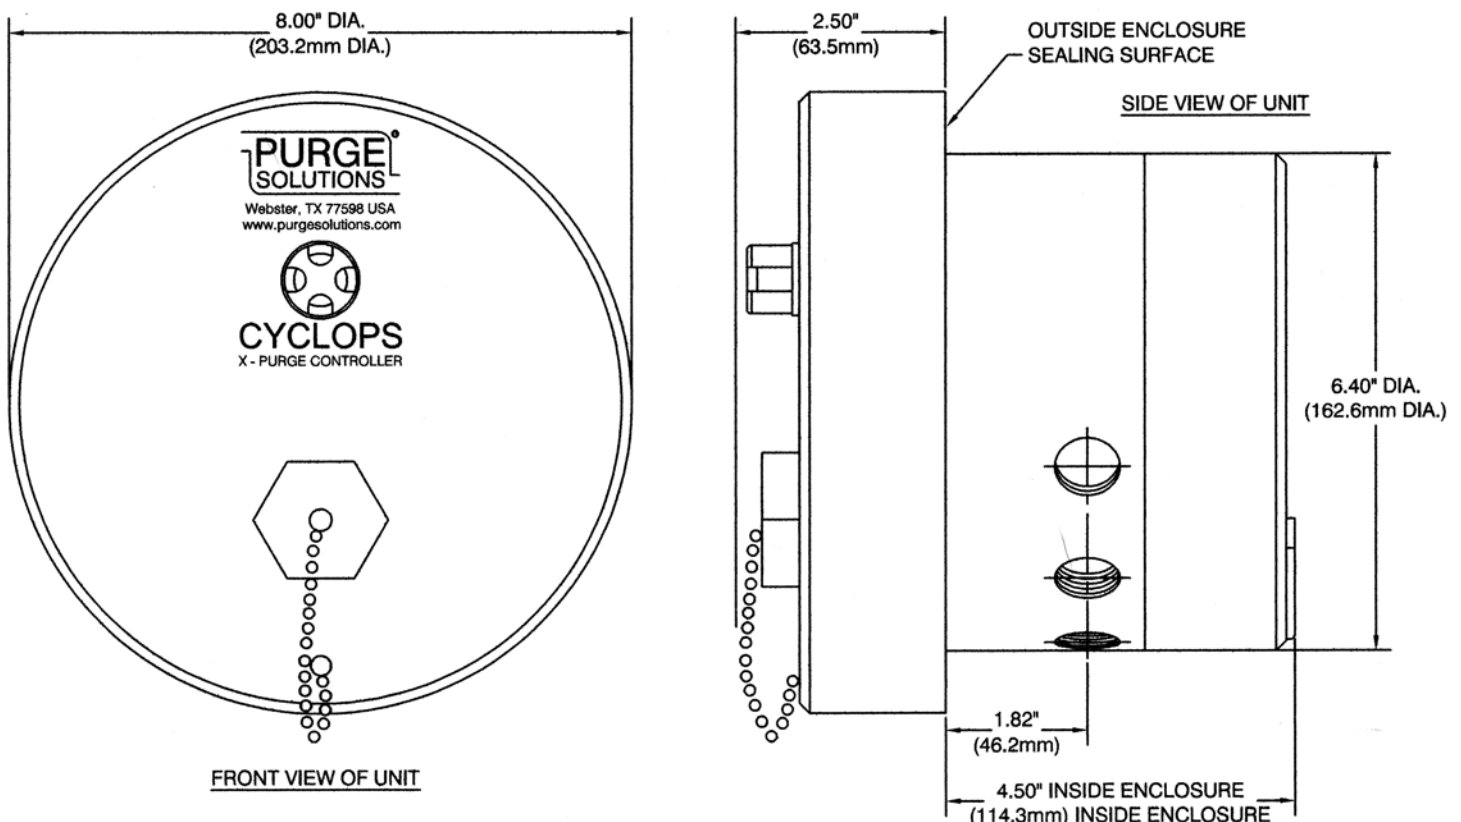


Figure 1



CYCLOPS

X – Purge Controller XP Version

OPTIONS AVAILABLE:

- **Purge Controller Casing:** Anodized aluminum (standard) 316 stainless steel (optional).
- **Input Voltages Available:** Either 115 VAC, or 230 VAC.
- **Purge Solutions Available Models:**
 1. Type X – Purge Controller: 115 VAC, Anodized aluminum: Purge Solutions model number PSC1-1A
 2. Type X – Purge Controller: 115 VAC, 316 stainless steel: Purge Solutions model number PSC1-1S
 3. Type X – Purge Controller: 230 VAC, Anodized aluminum: Purge Solutions model number PSC1-2A
 4. Type X – Purge Controller: 230 VAC, 316 stainless steel: Purge Solutions model number PSC1-2S
- **Continuous Pressure Air Inlet Kit:** For interfacing and regulating pressure of protective gas supply to enclosure. Small Continuous Pressure Air Inlet Kit for enclosures with a volume up to 15 cubic feet (425 liters). Model number PSO-SCP-A is our small aluminum version and PSO-SCP-S is our small stainless version. Small Continuous Pressure Air Inlet Kit supply gas inlet to regulator is 1/4-18 FNPT. Large Continuous Pressure Air Inlet Kit for enclosures with volumes above 15 cubic feet (425 liters). Model number PSO-LCP-A is our large aluminum version and PSO-LCP-S is our large stainless version. Large Continuous Pressure Air Inlet Kit supply gas inlet to regulator is 1/2-14 FNPT. All kits include input fitting, regulator, gauge, bracket and mounting hardware.
- **Automatic Leakage Compensation Air Inlet Kit:** Having two outlets from manifold able to increase the amount of purge gas to enclosure during dilution may be automatically selected to speed up dilution of potentially flammable materials to an acceptable level, reducing dilution time and permitting a more rapid restoration of power to purge protected equipment. Small Automatic Leakage Compensation Air Inlet Kits are for enclosures with a volume up to 15 cubic feet (425 liters). Model number PSO-SALC-1A is our small 115VAC, aluminum version, model number PSO-SALC-2A is our small 230VAC, aluminum version, PSO-SALC-1S is our small 115VAC, stainless steel version and model number PSO-SALC-2S is our small 230VAC, stainless steel version. Small Automatic Leakage Compensation Air Inlet Kit supply gas inlet to regulator is 1/4-18 FNPT. Large Automatic Leakage Compensation Air Inlet Kit for enclosures with volumes above 15 cubic feet (425 liters). Model number PSO-LALC-1A is our large 115VAC, aluminum version, model number PSO-LALC-2A is our large 230VAC, aluminum version, PSO-LALC-1S is our large 115VAC, stainless steel version and PSO-LALC-2S is our large 230VAC, stainless steel version. Large Automatic Leakage Compensation Air Inlet Kit supply gas inlet to regulator is 1/2-14 FNPT. All kits include input fittings, regulator, gauge, manifold block and solenoid valve.
- **Back-Up Vents:** To protect the enclosure from over pressure; Purge Solutions offers two sizes of back-up vents. The first size is our Small Back-Up Vent for enclosures with a volume up to 15 cubic feet (425 liters). Model number PSO-SBUV-S is our small side mount version and model number PSO-SBUV-T is our small top mount version. The second size we offer is our Large Back-Up Vent for enclosures with volumes above 15 cubic feet (425 liters). Model number PSO-LBUV-S is our large side mount version and model number PSO-LBUV-T is our large top mount version. All Back-Up Vents are constructed of 316 stainless steel and come with all mounting hardware.
- **Back-Up Purge Gas Kit:** In the event that the initial protective purge gas supply is lost, this kit insures that a back-up source of protective gas may be automatically applied to the protected enclosure. Purge Solutions model number is PSO-BUPG-K and has inlets and outlets of 3/8-18 FNPT.
- **Protective Gas Loss Indicator Kit:** An explosion-proof differential pressure switch may be installed to provide an alarm contact output signal to indicate the loss of the backup source of protective gas. A second can be installed to provide loss of back-up purge gas. Purge Solutions model number is PSO-PGLI-K.



CYCLOPS

X – Purge Controller
XP Version

OPTIONS AVAILABLE CONTINUED:

- **Purge Gas Supply Blower:** For applications where compressor gas is not available or has oil, which can introduce hydrocarbons into the purge enclosure, Purge Solutions offers a Purge Gas Supply Blower. The Purge Gas Supply Blower will be mounted in a non-hazardous area, where the blower fan within the system, will move up to 131 CFM (3,709 LPM) purge air through a 2 inch diameter (50.8 mm diameter) tube to the enclosure located within the hazardous area. The Purge Gas Supply Blower is constructed of 316 stainless steel and is available in 115VAC or 230VAC. The model number for the 115VAC system is PSO-GSB-1 and the model number for the 230VAC system is PSO-GSB-2.
- **Differential Pressure Gauge Kit:** Purge Solutions also offers an all stainless steel differential pressure gauge kit, which can be mounted on left side model number PSO-DPG-L, right side model number PSO-DPG-R, top model number PSO-DPG-T or bottom model number PSO-DPG-B of enclosure.

GENERAL SPECIFICATIONS:

- **Casing Dimensions:** 8.0" diameter x 1.9" tall (203.2mm diameter x 48.3mm tall), protrudes outside of purged enclosure. 6.5" diameter x 4.50" tall (165.1mm diameter x 114.0mm tall), protrudes inside of purged enclosure.
- **Operating Temperature Range:** - 40°F to 150°F (- 40°C to 65°C).
- **Purge Pressure Lower Limit:** 0.30 inches H₂O (0.75 mbar) Purge Controller will disconnect power to protected enclosure electronics.
- **Casing:** Anodized aluminum, 16.09 lbs. (7.30 kg), NEMA 4 (IP66) or 316 Stainless steel, 37.98 lbs. (17.23 kg), NEMA 4X (IP66).
- **Power Control Capability:** 12.5 Amps RMS continuous over specified voltage ranges.
- **Voltage:** 115 VAC model (85 VAC to 160 VAC) and 230 VAC model (130 VAC to 265 VAC), 47 to 63 Hz.
- **Dry Contact Outputs & Rating:** 1. Enclosure purge pressure is below 0.30 inches H₂O (0.75 mbar), 2. Enclosure exhaust flow has stopped, 3. Purge Controller is in maintenance mode. Contacts open on alarm (standard). Contacts closed on alarm (optional). All rated to 265 Volts AC/DC, 150mA max
- **Standard Hardware:** Stainless steel mounting hardware, o-ring, 3/8" (9.2mm) and 1/4" (6.4mm) diameter exhaust vent restrictors and CD with all required documentation.
- **Hazardous Area Approvals:** (ATEX and IECEx) II 2 G Ex e mb [px] IIC T4 Gb "for Zone 1 gas hazardous areas" II 2 D Ex tD [px] A21 119°C IP66 Db "for Zone 1 dust hazardous areas" (NEC / NFPA and CEC) Class 1, Division 1, Groups B,C,&D, T6 and CE Marked.